



CCITT G.703 D-Sub 37 Pin, Male to Female



Features:


- Connects 75 ohm dual coax to 120 ohm twisted pair
- Bi-directional signal conversion according to CCITT G.703
- Miniature size with mounting supports
- 37pins D-Sub connectors provided

Description:


The CCITT G.703 balun panel matches multiple sets of dual 75 ohm coax connections to multiple 120 ohm twisted pair connections. Supporting E1 bit rates up to 2 Mbit/s and E2 to 8 Mbit/s, the panel bi-directionally match, not only signal impedance, but also the pulse shapes of the signals according to the CCITT G.703 standard.

Specification:

Bit Rates:	2 Mbit/s (E1)	8 Mbit/s (E2)	
Impedance:	75 ohm to 120 ohm		
Insertion loss:	Max. 0.2dB	Max. 0.3dB Max. 0.9dB from 0.2-70MHz	
Return loss:	-29dB	-21B -15dB from 1 to 70 MHz	
Cross talk:	40dB typical		
Pin IN/OUT:	Port 1: 1+/2- Port 2: 3+/4- Port 3: 6+/7- Port 4:8+/9- Port 5: 11+/12- Port 6: 13+/14- Port 7: 16+/17- Port 8:18+/19- Port 9: 20+/21- Port10: 22+/ 23- Port11: 25+/ 26- Port12:27+/28- Port13:29+/30- Port14: 31+/ 32- Port15: 34+/ 35- Port16:36+/37-		
Dimension:	110*70*28 in mm		

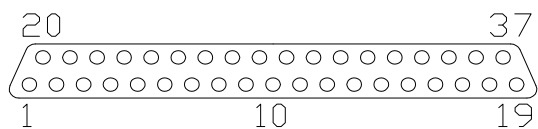

D-Sub 37pin Female(75 ohms)

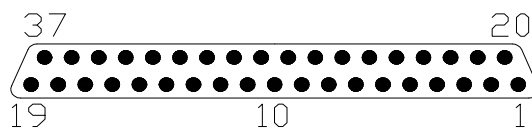

D-Sub 37pin male(120 ohms)

Installation:

1. Make the connections to all ports both at 75 ohms(Female) and 120 ohms (male) sides by following the pin IN/OUT shown above .
2. The total allowable cable lengths are subject to the constraints of the ITU/CCITT G.703 recommendation. However, we recommend a total patch cable length, including coaxial and twisted pair cabling, of no more than 180m.

Warranty:

Seller warrants that this product is to be free from defect in materials and workmanship for one (1) year. The warranty given by seller is in lieu of any other warranties, express or implied. This warranty does not apply to units abused through misuse or subjected to improper and/or excessive voltage, beyond our control. Seller assumes no responsibility for damages or penalties incurred resulting from the use of this product. Seller's liability under any warranties shall be discharged by replacing or repairing, at our option, the defective product. Seller's liability for any product shall not exceed a refund of the purchase price. The warranty listed here is intended only as a summary of your full and complete warranty.

Caution:

Do not attempt to open the body, as there are no user-serviceable parts inside Balun. Opening the unit will void your warranty.