
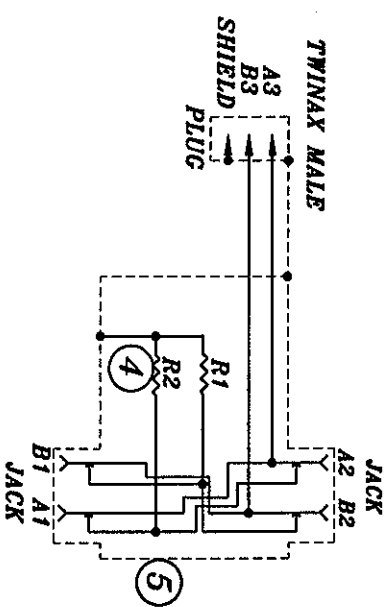

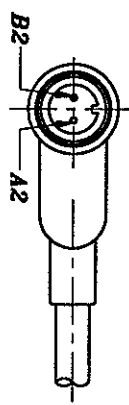


300.0 ± 10

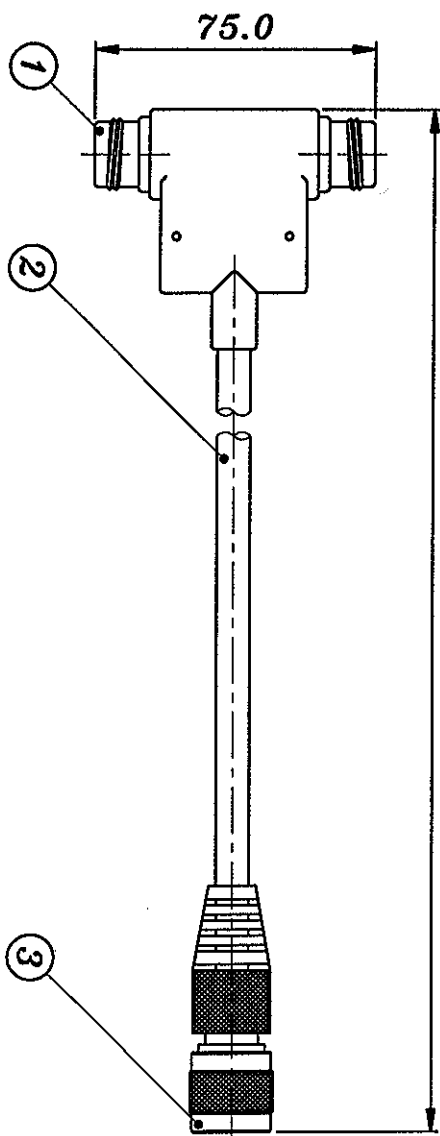

5	1PC	PCB
4	2PCS	RESISTOR 549Ω ± 1% 1/4W
3	1set	TWINAX MALE WELDING TYPE
2	SPE DNG	TWINAXIAL CABLE 2COND 20AWG, 17PINNED 100Ω, BLACK (GREY) PVC JACKET TWINAX FEMALE/FEMALE PIN GOLD FLASH, GOLD BLACK (GREY)
1	1set	PVC JACKET
ITEM	QTY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCE ARE:  
FRACTIONS DECIMALS ANGLES  
X ± 0.1  
X ± 0.05

FINISH DO NOT SCALE DNG.

CONTRACT NO.	
APPROVALS	DATE
HSIEN	12/08 98
CHECKED	ISSUED

**LEMAR ENTERPRISES CO. LTD**

TWINAX T SELF TERMINATING  
BUS CABLE  
(F.F-TWINAX 3.4 KEY)

SIZE A4 PSCH NO. 8001002 DNG NO. 8001002 REV.

SCALE 1 : 2 SHEET OF